


30 kW Water cooled



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 Ω \pm 5%
Frequency	DC - 1 GHz
Max VSWR	\leq 1.10 at 860 MHz
Average power	30 kW (Potable water)
Water flow	2 m ³ /h
Max input water Temperature	+60°C
Max input water pressure	7 bars
Potable water	7 < pH < 8.2, mineral salts concentration < 75 ppm
Weight	7 kg

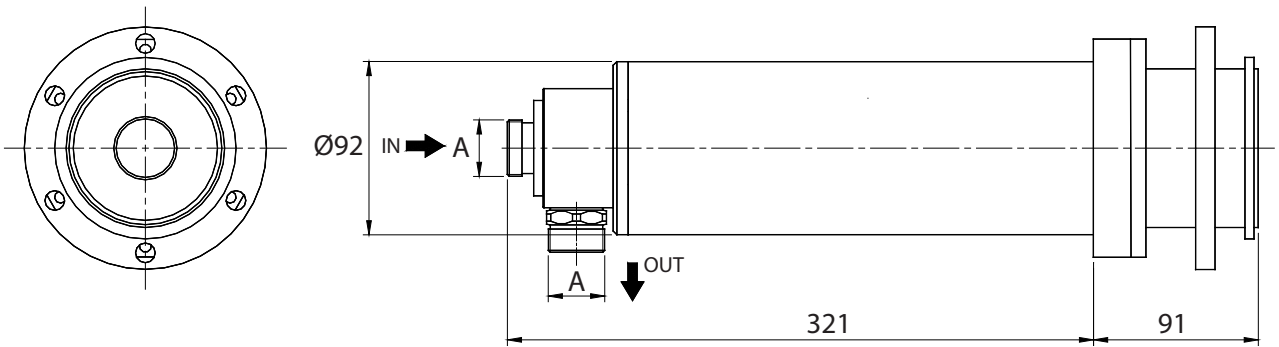

Dimensions in mm

P/N	Connector	A
17-0506	EIA 3.1/8"	1"
17-0087	EIA 3.1/8"	M30

Option	VSWR \leq 1.06 470 to 860 MHz for digital applications
--------	--